

Pumps PL

SMALL PUMP FOR OUTSTANDING RESULTS!



High-performance



Silent operation



Above-ground and in-ground pools up to 68 m³



Wide range



230 V-50Hz
SINGLE

ASSETS

- High-performance for everyone
Incomparable quality for an unbeatable price!
A compact pump that will meet all your needs
- Silent operation
Produces no noise disturbance
- Ideal for small pools and above-ground pools up to 68 m³

IDEAL FOR SMALL AND MID SIZE POOLS

- Easy maintenance thanks to its transparent cover and large strainer
- Winterize your pump in a single movement using its drain plug
- Easy installation (fittings included with the pump)
- Compatible with water treatment by salt chlorination
- Pump shaft in stainless steel
- 50 mm outlet or \varnothing 32/38 mm fluted adapters
- Self-priming pump with fully enclosed, ventilated engine
- Wide range available, single-phase and three-phase, 0.25 to 1.5 HP



- 50 mm outlet or \varnothing 32/38 mm fluted adapters


- Easy-open strainer thanks to its twist-lock cover

- Drain release plug for easy winterizing




| Item | Power | Flow Rate* | IN/OUT | Weight | Input Power P1 | Output Power P2 | Amperage | Gencod | 2020-2021 Price** |
|-----------------------------|---------|------------|-------------------|---------|----------------|-----------------|----------|---------------|-------------------|
| SINGLE PHASE PUMP PL | | | | | | | | | |
| 81002 | 0.25 HP | 5.4 m³/h | 50 mm or 32/38 mm | 7.68 kg | 380 | 300 | 1.6 A | 0610377237031 | 233.89 € |
| 81003 | 0.33 HP | 7.3 m³/h | 50 mm or 32/38 mm | 7.76 kg | 470 | 320 | 2 A | 0610377237048 | 253.37 € |
| 81004 | 0.5 HP | 10.8 m³/h | 50 mm or 32/38 mm | 8.65 kg | 610 | 560 | 2.6 A | 0610377237055 | 272.85 € |
| 81005 | 0.75 HP | 13 m³/h | 50 mm or 32/38 mm | 9.16 kg | 790 | 610 | 3.4 A | 0610377237062 | 292.33 € |
| 81006 | 1 HP | 15 m³/h | 50 mm or 32/38 mm | 9.16 kg | 920 | 730 | 4 A | 0610377237079 | 331.40 € |
| 81007 | 1.5 HP | 17.2 m³/h | 50 mm or 32/38 mm | 11.3 kg | 1110 | 900 | 4.8 A | 0610377274210 | 350.88 € |

* under 8 m water column pressure

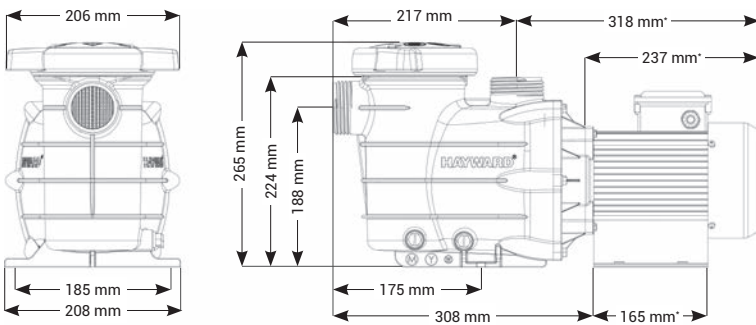

Technical Specifications

| | |
|-------------------------------|-----------------------------------|
| Max. water temp. | 35°C |
| Adapter | 32/38 mm |
| Mechanical seal | AISI 304, suitable for salt water |
| Motor specifications | Class F, IP55, 50Hz, 2 Poles |
| Housing/impeller/strainer/lid | PP+GF/Noryl® + GF/ABS/PC |

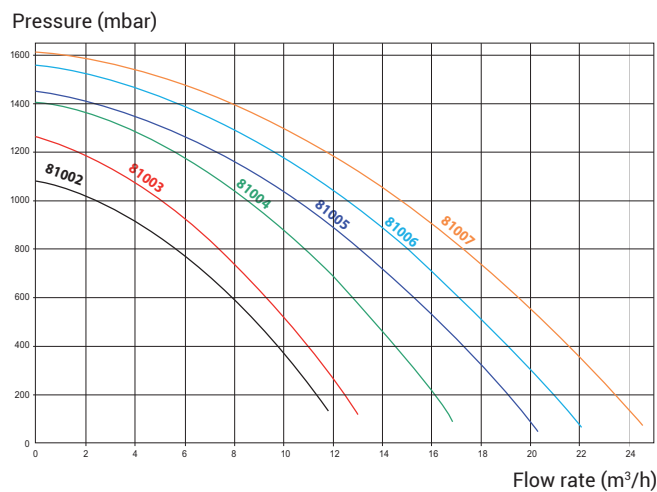

** RRP: Recommended Retail Price (excluding tax) - valid from October 1, 2020 until September 30, 2021